

Fig. 2(A)
PRIOR ART

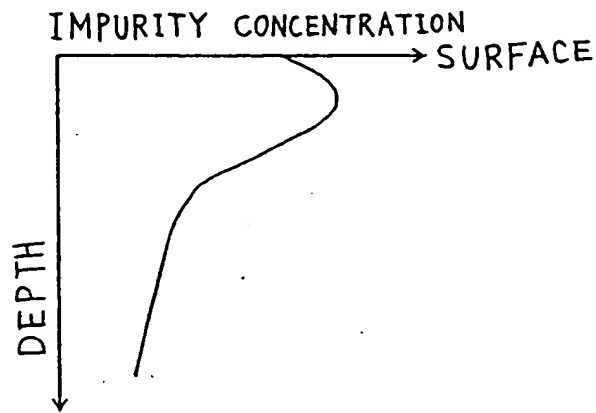


Fig. 2(B)
PRIOR ART

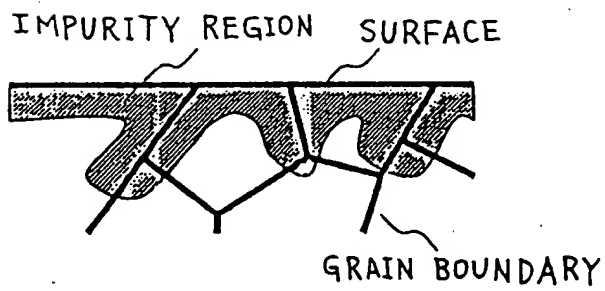


Fig. 2(c)
PRIOR ART

A schematic diagram of a laser light source assembly. A rectangular box (301) contains a laser medium (302) and a series of small circles (306) representing a cooling system. A laser beam (303) is shown exiting the box. A power supply (307) is connected to the bottom of the box. A label 304 points to the laser medium, and a label 305 points to the cooling system. A label 308 points to the laser beam.

Fig. 3




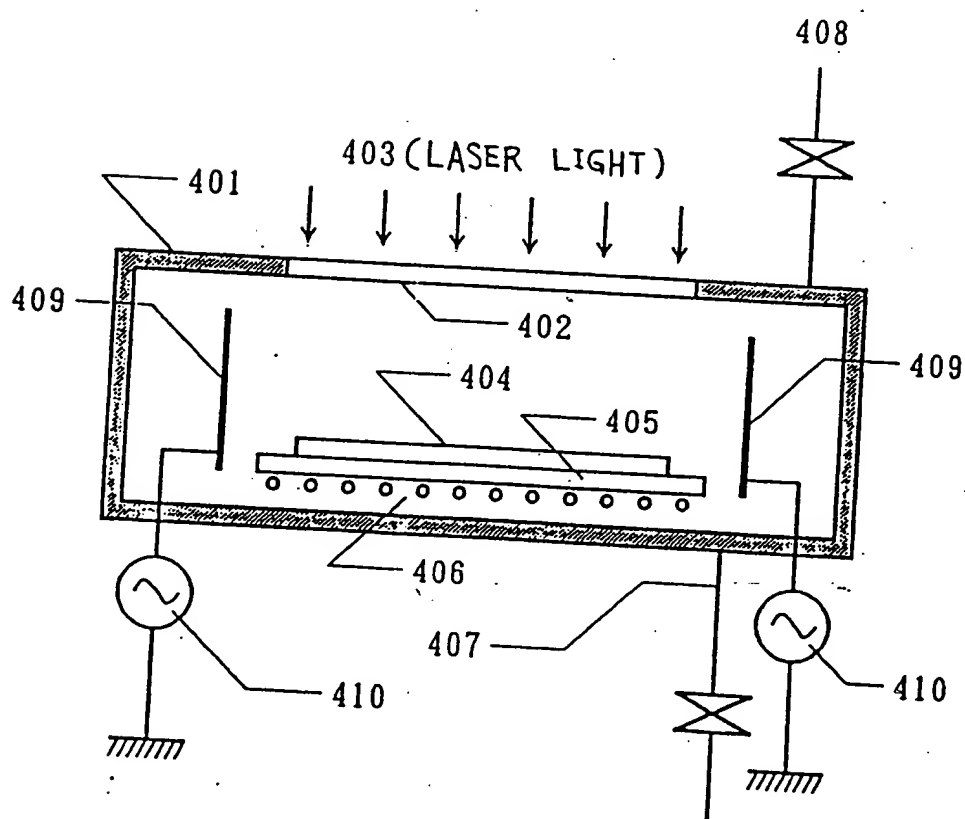


Fig. 4

66270-01662260

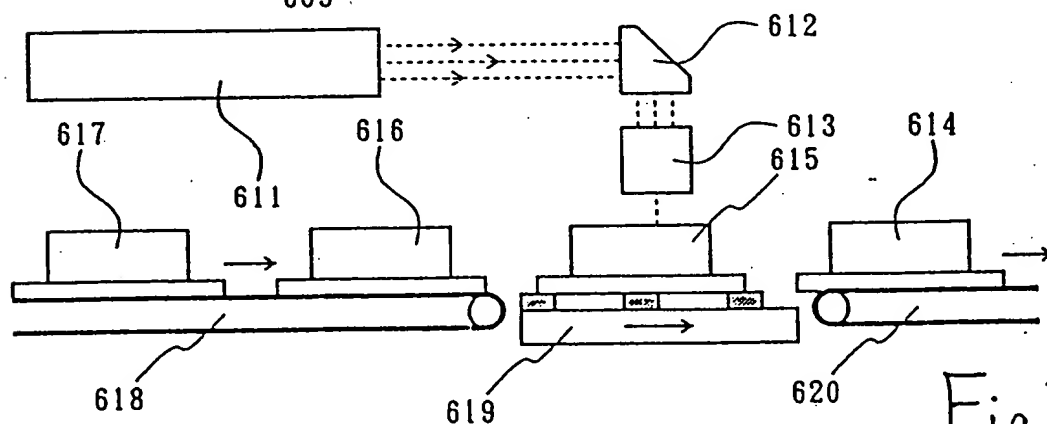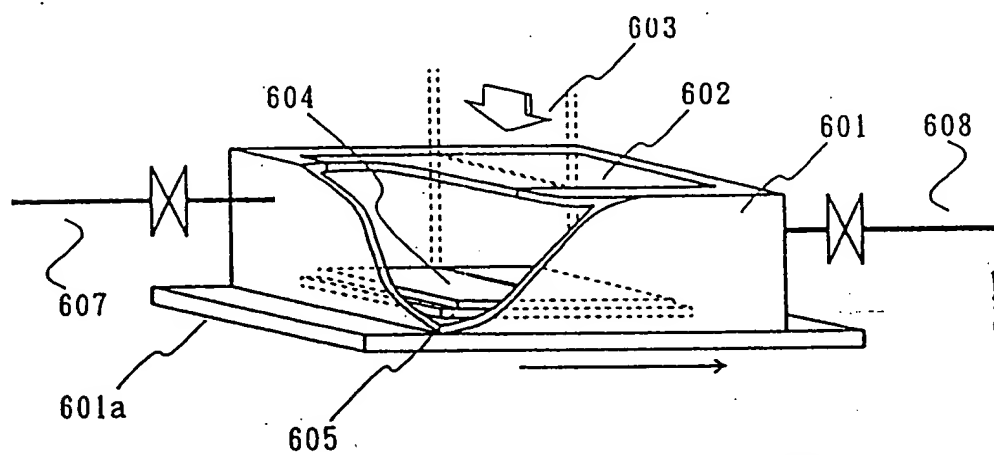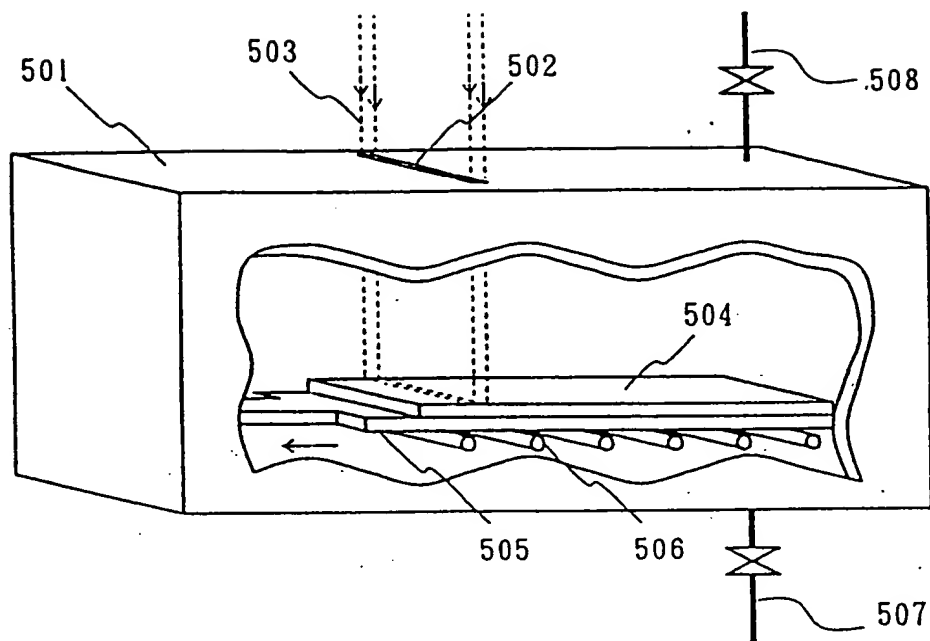

0000000000000000

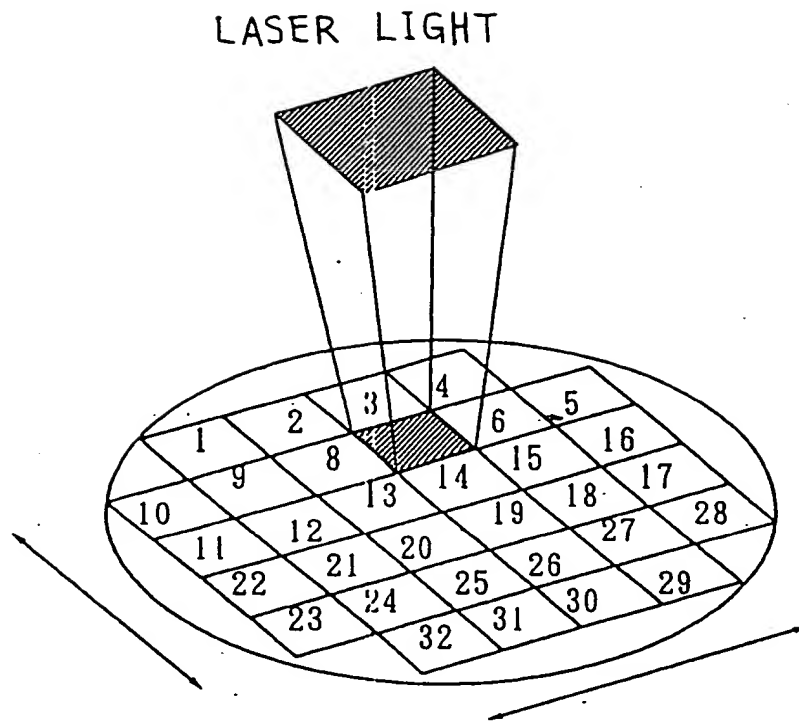


Fig. 7

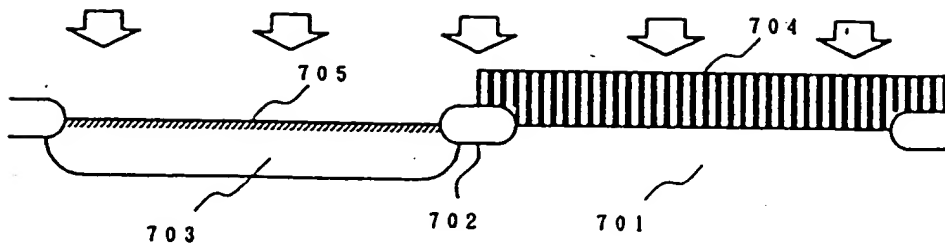


Fig. 8(A)

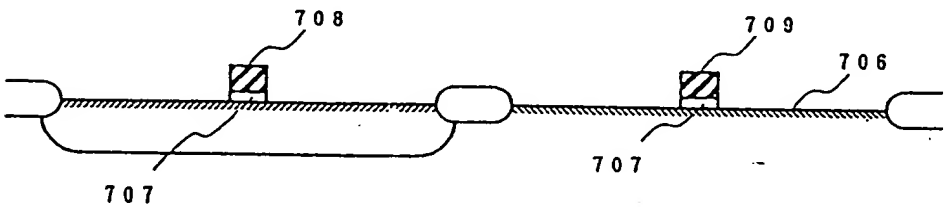


Fig. 8(B)

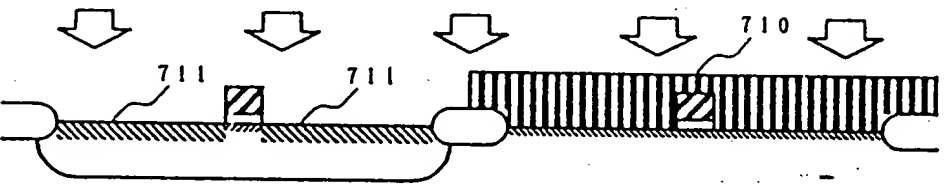


Fig. 8(C)

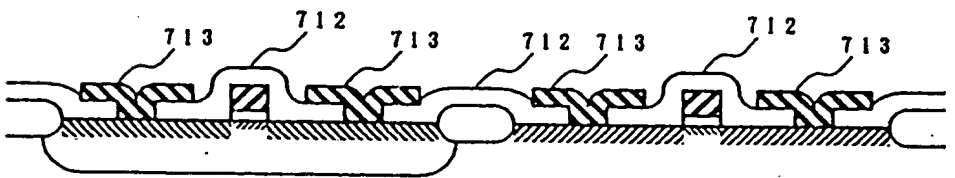
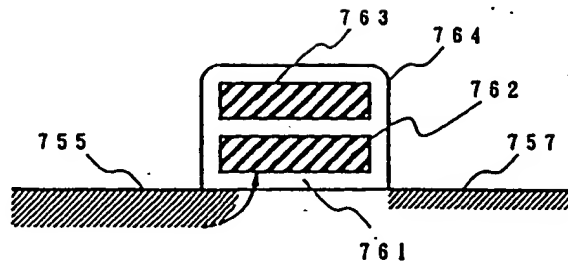
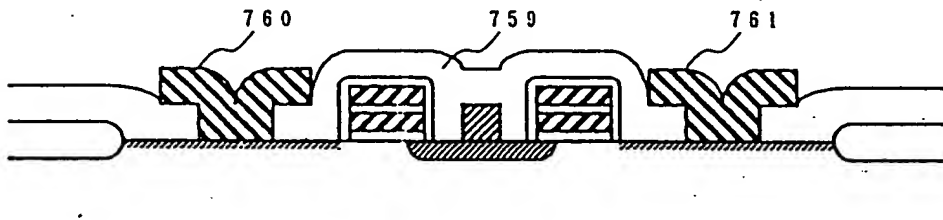
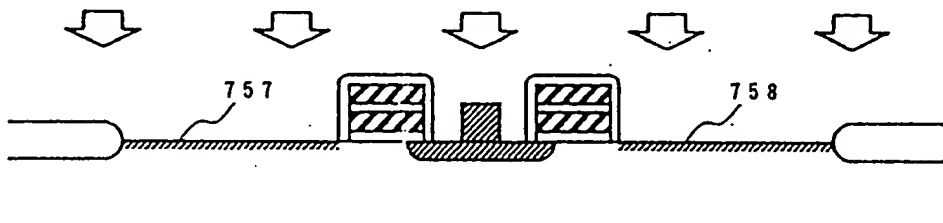
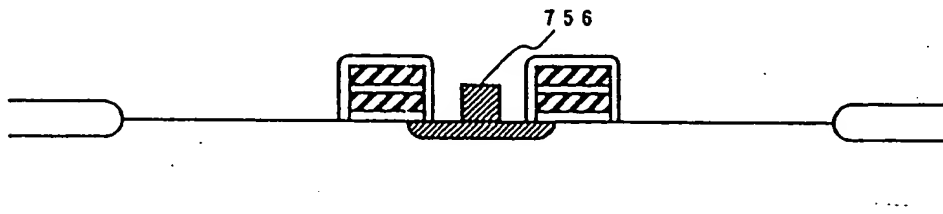
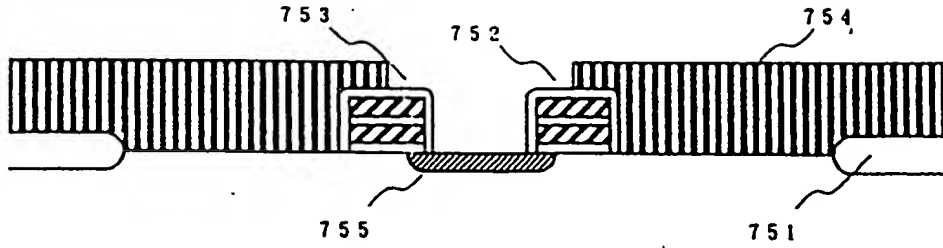


Fig. 8(D)

66270-8162250



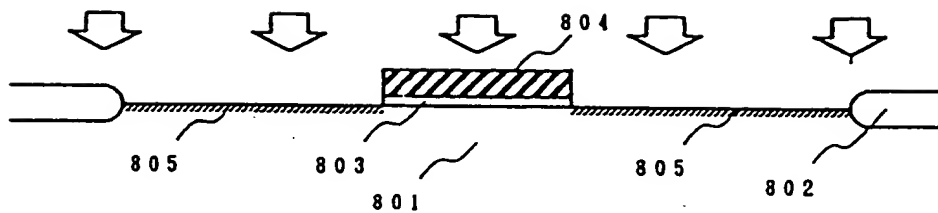


Fig. 10(A)

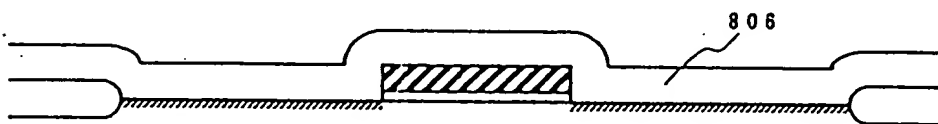


Fig. 10(B)

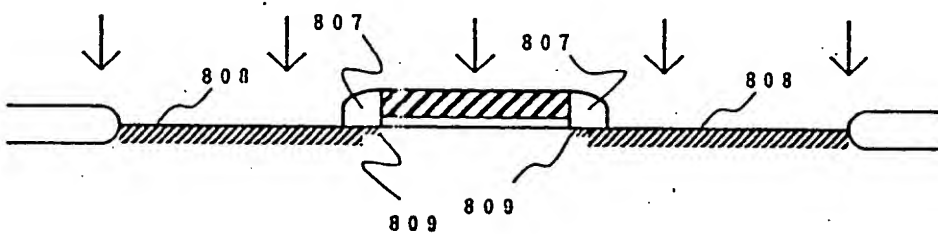


Fig. 10(c)

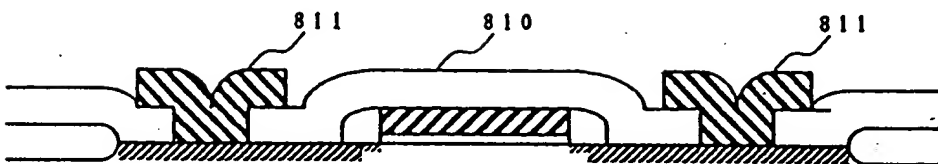


Fig. 10(D)

66670-8466250